Installation Instruction

Item No: 8590 –TL 8591 – TL

8593 –TL 8599 -TL

1. Carefully unpack and take out the parts as picture shown.
2. Adjust the pipe to its desired position, then thread thumb screw into the coupling tightly.
3. Open the cover(A) , carefully insert the bulb(B) into the socket , close the cover.
   DO NOT EXCEED THE MAXMUM WATTAGE RATING!

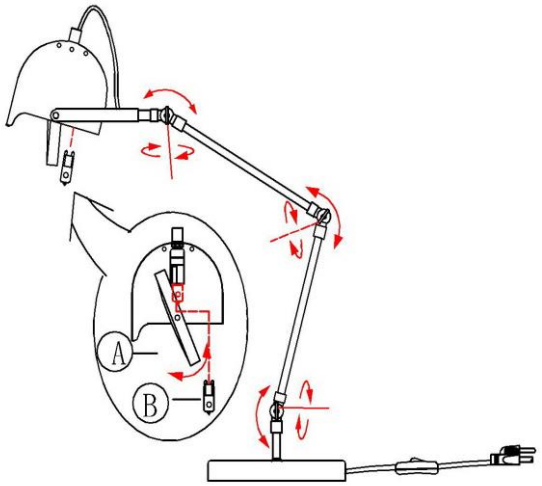

Important Safety Instruction

This portable lamp has a polarized plug (One blade is wider than the other) as a safety feature to reduce the risk of the electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit in the outlet, reverse the plug. If it still does not fit, consult a qualified electrician. Never use an extension cord unless the plug can be fully inserted. Do not alter the plug.

Note: MAX 25 watt type G9 / 120V

WARNING ! – To reduce the risk of fire ,electric shock, or personal injury:
- Turn off / unplug lamp and allow to cool before replacing bulb.
- Do not touch bulb when fixture is turned on
- Do not look directly at lighted bulb
- keep materials that burn easily away from lighted bulb

CLEANING:

Use only soft cloth to dust and clean fixture. Never use chemicals or abrasive cleaners as it may damage finish

★Keep this instruction for future reference